

Modelling and Simulation of Thermal Actuator Using Polysilicon Material

**Girija M. Nimbali¹, S.V. Halse², Naziya³, Firdous G.³,
Suvarna V.⁴ and B. Jyoti⁵**

*Karnataka State Women's University Bijapur
girija_mnimbali@yahoo.com, drsvhalse@rediffmail.com*

Abstract

Electro-thermal micro actuators that operate by virtue of constrained thermal expansion induced by Joule heating have recently received considerable attention. We use electro-thermal actuation to create monolithic compliant devices with embedded actuation in which the actuator and the mechanism are indistinguishable. These devices can be made at micro (micron size) or meso (hundreds of micrometers to a millimetre size) scales using any conducting material. The scaling effects on these devices, and also present a comparative study of essential and natural boundary conditions used in the thermal analysis. This present paper consists of a two thermal actuator made of polysilicon. The actuator is activated through thermal expansion. The temperature increase required to deform the two actuators, and thus displace the actuator is obtained through Joule heating. The greater expansion of the actuator arms, compared to the another arm, causes a bending of the actuator. The material properties of polysilicon are temperature dependent, which means that the involved physics phenomena are fully coupled. The electric current through the another arms increases the temperature in the actuator, which in turn causes thermal expansion and changes the electrical conductivity of the material.

Keywords: MEMS, Thermal Actuator, Comsol Multiphysics

INTRODUCTION

The operating principle of electro-thermal micro actuators is the constrained thermal expansion of a flexible continuum of material as a result of Joule heating. Recently, these actuators have received considerable attention [1-7]. A micro-actuator is the key device for micro-systems to perform physical functions. Micro-mechanical actuators

have become the hallmark of micro-electro mechanical systems (MEMS) since their inception about thirty years ago. The actuation principles that have been used are electrostatic [1], piezo-electric [2], electromagnetic [3], electro-thermal [4], [5], thermo-pneumatic [6], electrochemical [7], electro- and magnetostrictive, shape memory and mass transport effects. Large displacements (more than $20\ \mu\text{m}$) and large forces (more than $40\ \text{mN}$) made the electro-thermal actuation one of the most popular actuation mechanisms. The electro thermal actuators are designed by the solution of thermo-elastic deformation and heat transfer problem. Many authors have solved the heat transfer problem analytically, we consider that the beam has no internal heat sources and the radiation is neglected. Here the convection heat transfer coefficient h is unit form on all the surfaces, and the physical properties thermal conductivity k , specific heat at constant pressure C_p , density ρ is constant. The length l is considered sufficiently larger than the height a and the width b to neglect the variation of the temperature T along axes y and z . consequently.

MODEL GEOMETRY:

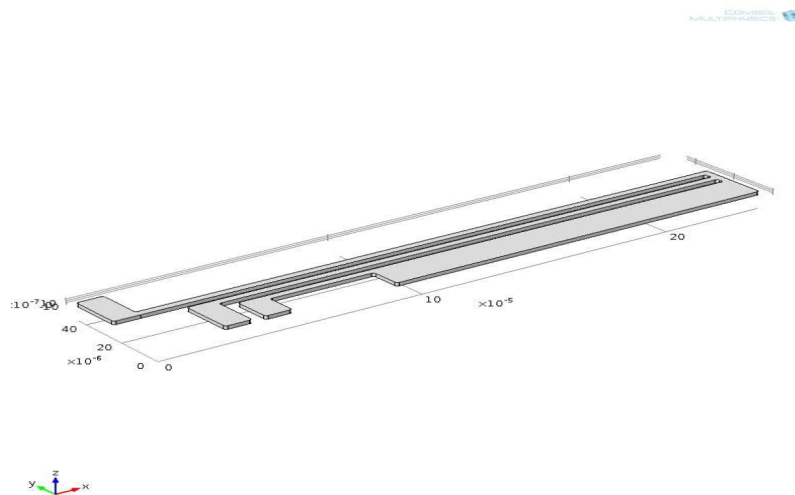


Fig.1 Geometric Model of Thermal Actuator

All three arms are mechanically fixed at the base of the three anchors. The dimples can move freely in the plane of the substrate (the xy -plane in the figure) but do not move in the direction perpendicular to the substrate (the z direction). The temperature of the base of the three anchors and the three dimples is fixed to that of the substrate's constant temperature. Because the structure is sandwiched, all other boundaries interact thermally with the surroundings by conduction through thin layers of air. The heat transfer coefficient is given by the thermal conductivity of air divided by the distance to the surrounding surfaces for the system. This exercise uses different heat transfer coefficients for the actuator's upper and other surfaces. In this paper attempt has been made to calculate and simulate deformation in thermal actuator for

different geometry. Polysilicon is selected as material for the substrate. The material properties of the polysilicon accounted are young's modulus (163GPa), Poisson's ratio (0.22) density ($\rho= 2330\text{Kg}\text{m}^3$). The analytical equation used to calculate for thermal actuator is given by equation (1)

$$\rho C_p u_{\text{trans}} \cdot \nabla T = \nabla \cdot (k \cdot \nabla T) + Q \tag{1}$$

MESH:

The figure shows the deformation of thermal actuator in comsol multiphysics top of the portion where voltage is applied and is separated by grounded actuator by gap of $2\mu\text{m}$ is shown in 2. The element size of the parameters are maximum element size is $1.32\text{E}-5$, Minimum element size $96\text{E}-7$, Maximum element Growth rate 1.4, Resolution of curvature 0.4 Resolution of narrow regions 0.7 and the mesh element has 5670.

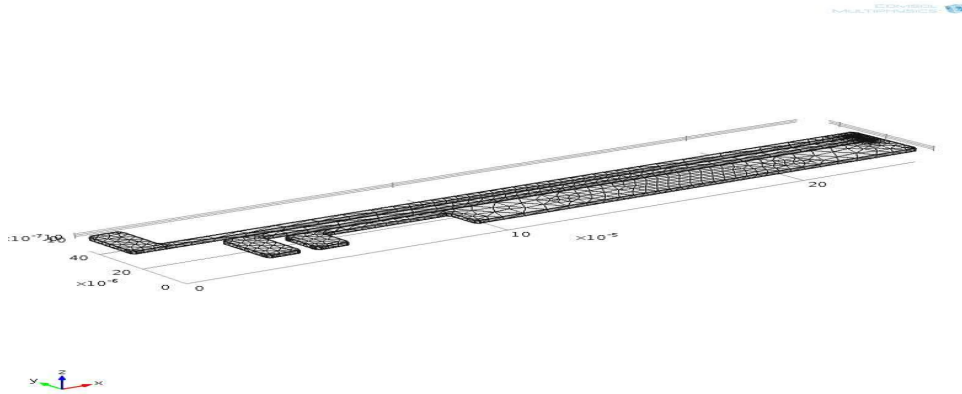


Fig.2 Thermal actuator mesh

MODELLING IN COMSOL:

The present paper shows the how the thermal actuator using different applied voltage which gives different Temperature is observed respect temperature. Is shown in figure 3. Applied Voltage and Temperature. Figure 4 shows the electric potential of slice.

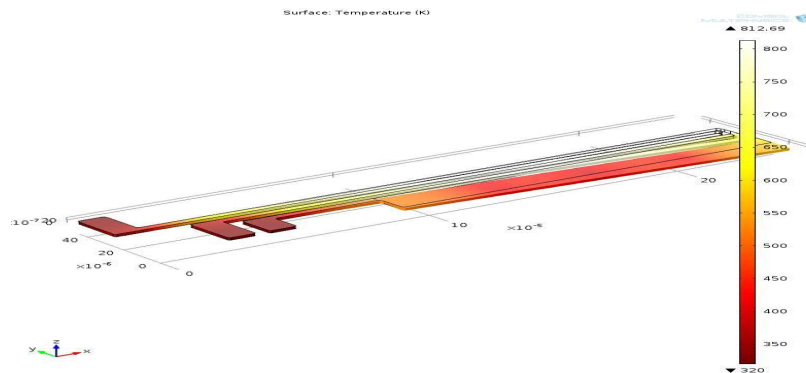


Figure .3: Applied Voltage and Temperature



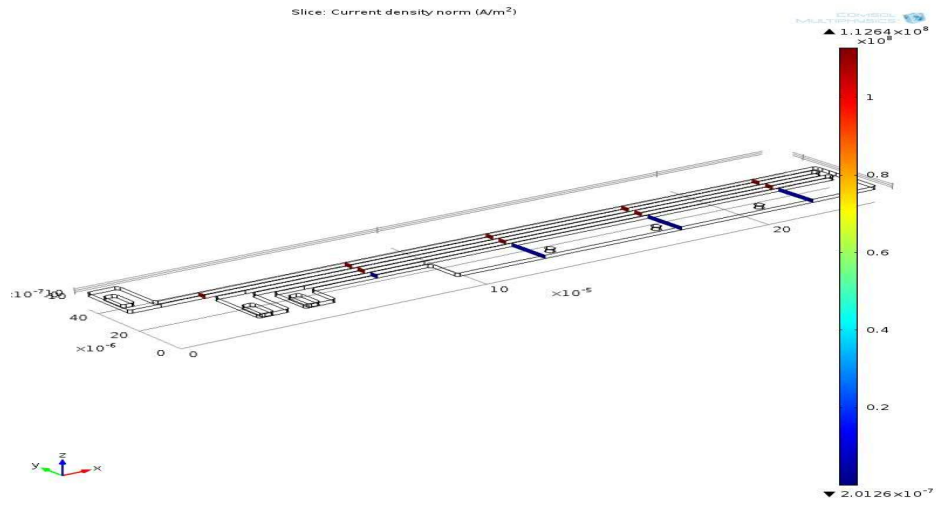


Figure 4: Electric potential for Slice

Results:

The result part shows the how the applied voltage increasing then temperature is increased is shown in below figures.

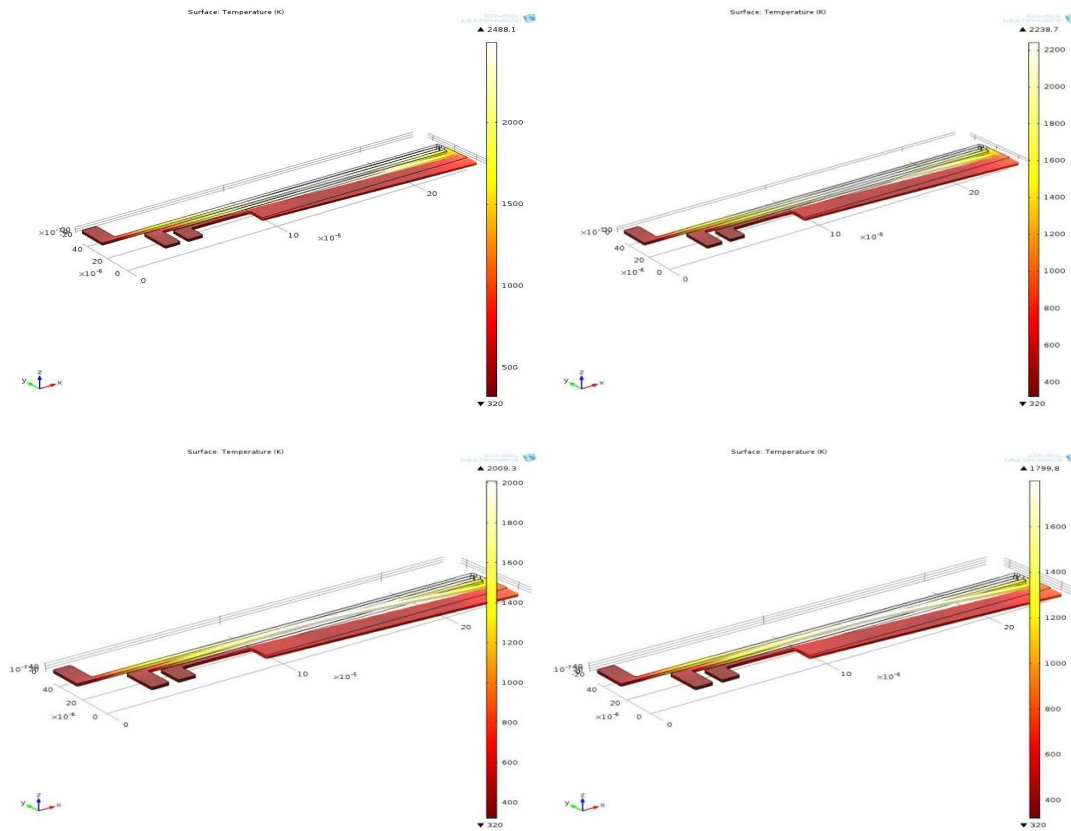

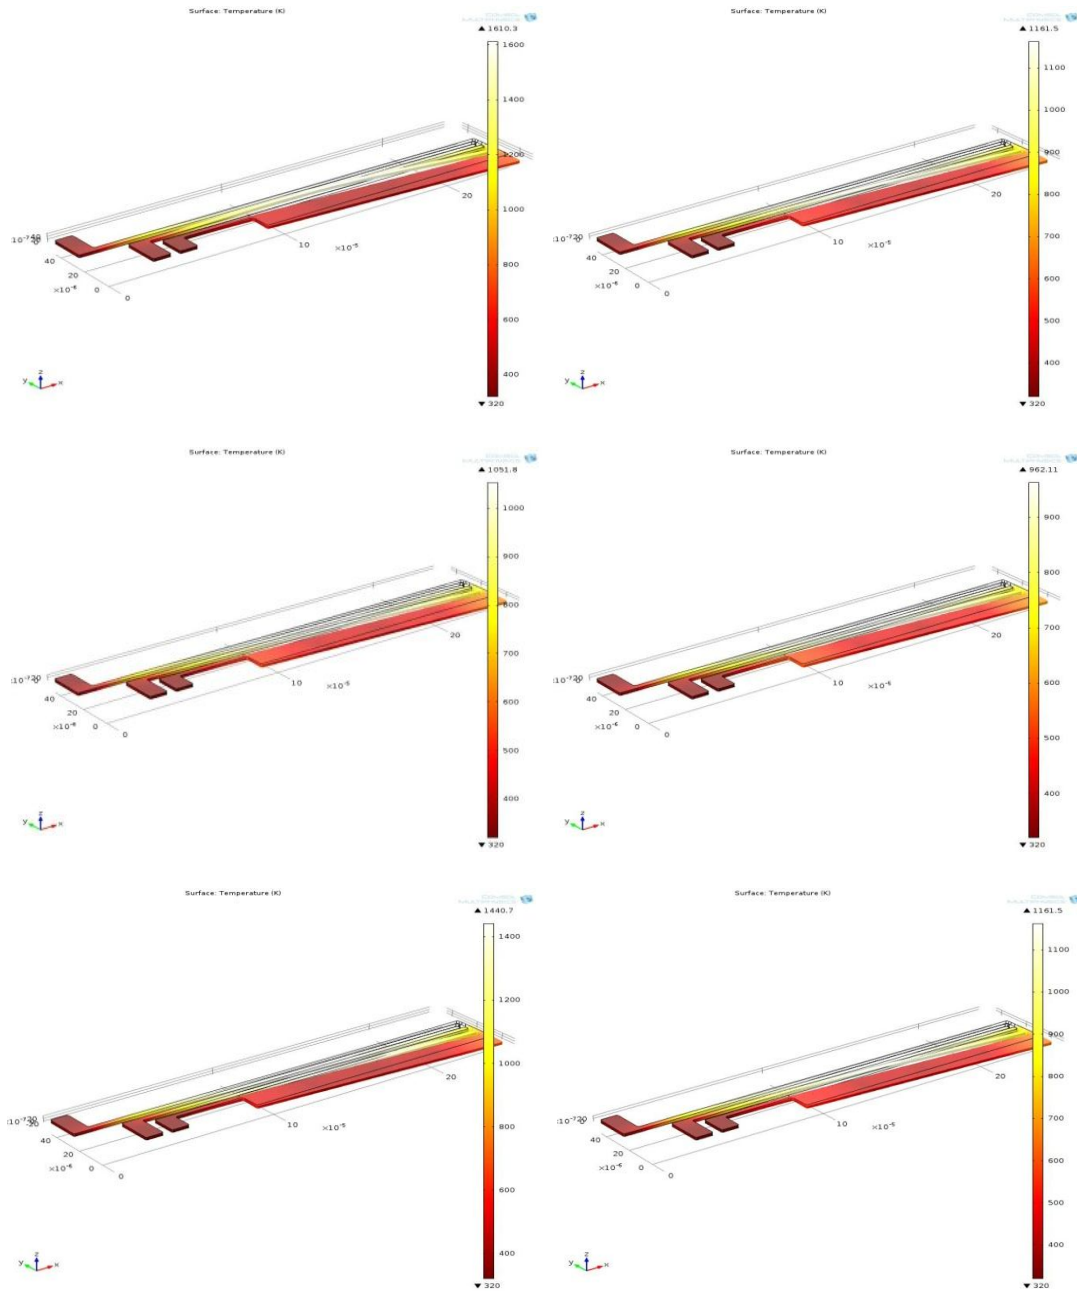

Conclusion:

The temperature increase required to deform the two actuators, and thus displace the actuator is obtained through Joule heating. The greater expansion of the actuator arms, compared to the another arm, causes a bending of the actuator. The material properties of polysilicon are temperature dependent, which means that the involved physics phenomena are fully coupled. The electric current through other arms increases the temperature in the actuator, which in turn causes thermal expansion and changes the electrical conductivity of the material. The micro actuator is subjected to

controlled thermal expansion by applying a voltage through parts of the structure which induces joule heating of the parts. The external expansion causes the actuation to deflect. The simulation predicts the deflection as a function of the operating conditions for different designs.

References

- [1] Guckel, H., Klein, J., Christenson, T., Skrobis, K., Laudon, M., and Lovell, E.G., Thermo Magnetic Metal Flexure Actuators, Solid State Sensors and Actuators Workshop, Hilton Head Island, 1992, pp. 73-75.
- [2] Comtois, J. and Bright, V. Surface Micromachined Polysilicon Thermal Actuator Arrays and Applications, Hilton Head 1996, p. 174.
- [3] Moulton, T., "Analysis and Design of Electro-Thermal-Compliant Micro Devices," Center for Sensor Technologies at the University of Pennsylvania technical report # TR-CST31DEC97, pp. 13-26.
- [4] Moulton, T. and Ananthasuresh, G.K. Micromechanical Devices with Embedded Electro Thermal-Compliant Actuation, Micro-Electro-Mechanical Systems (MEMS) Symposium at the IMECE 99.
- [5] Lin, L. and Chiao, M. Electrothermal Responses of Line shape Microstructures, Sensors and Actuator A, 55, 96, pp. 35-41.
- [6] Huang, Q. and Lee, N., Analysis and Design of Polysilicon Thermal Flexure Actuator, J. Micromech. Microeng, 9, 98, pp. 64-70.
- [7] Cragun, R. and Howell, L.L., "A Constrained Thermal Expansion Micro-Actuator," DSC-Vol. 66, Micro-Electro-Mechanical Systems (MEMS) Symposium at the IMECE 98, pp. 365-371.